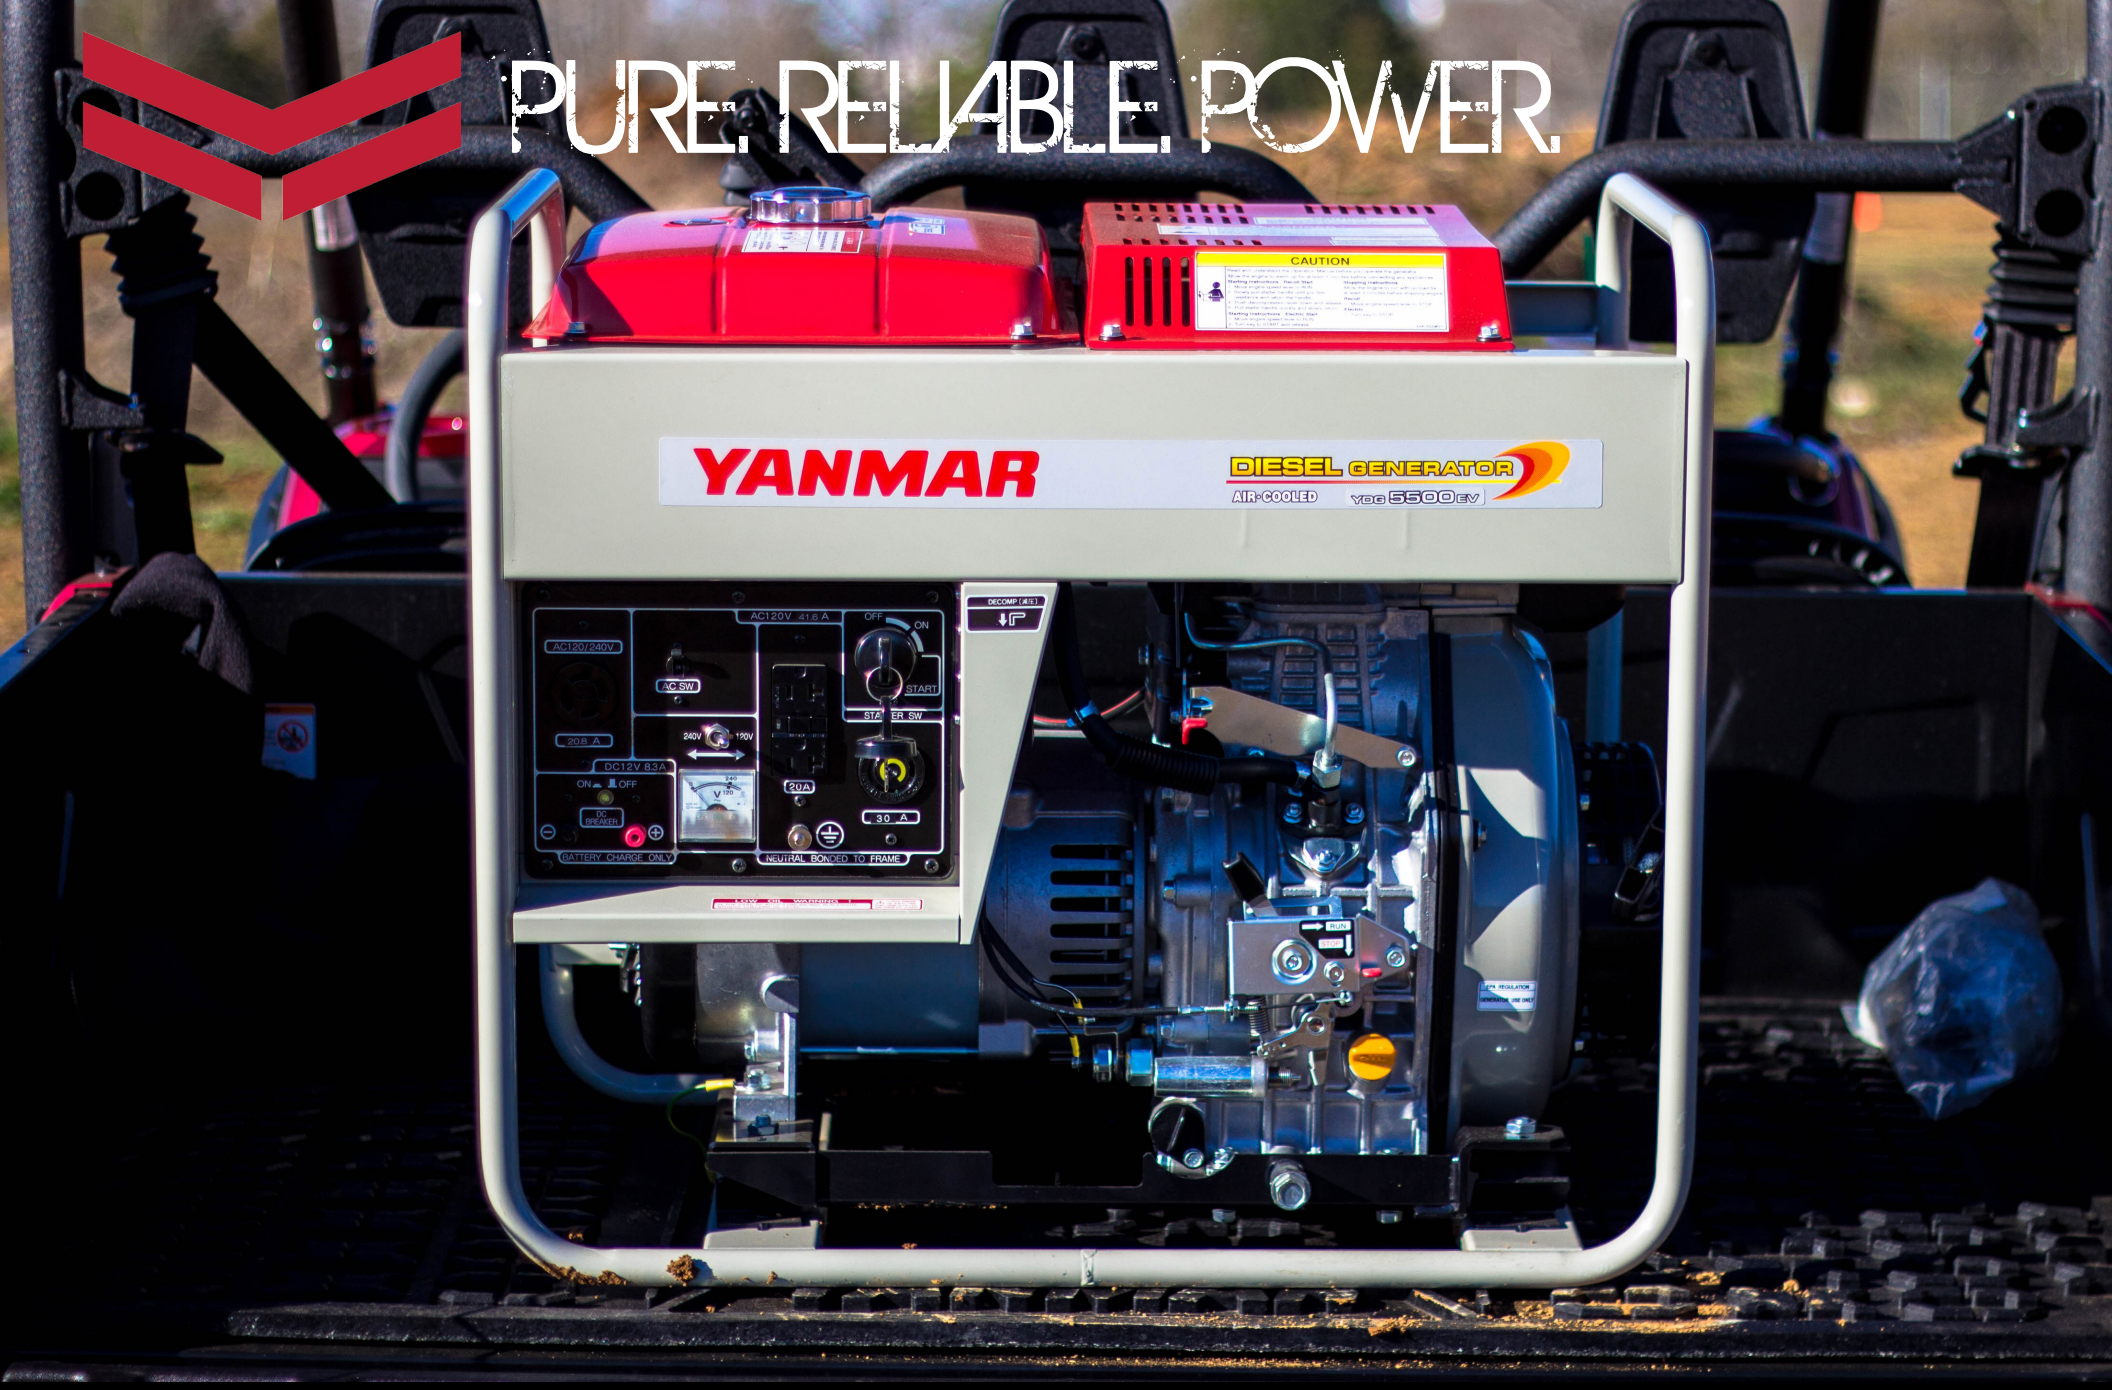

CONTRACTOR GRADE. EPA FINAL TIER 4. ALWAYS CLEAN,
EVEN AT ITS DIRTIEST. THE YDG-W, BY YANMAR.

SPECIFICATIONS

			YDG3700W-6EI	YDG5500W-6EI
Generator	Type		Revolving field type 2 pole generator	
	Frequency	Hz	60	
	Max. AC output	kVA	3.7	5.5
	Cont. AC output	kVA	3.5	5.0
	Related Power Factor	%	100	
	Phase		Single Phase	
	Excitation system		Self-excitation	
	DC output (generator & charger)	V-A	12-8.3	
	Voltage	V	120/240	
Engine	Model		L70W6-GEY	L100W6-GEY
	Type		Vertical, 4-cycle, air-cooled diesel engine	
	Displacement	cc	320	435
	Cont. output kW/min-1(rpm)		4.3/3600	6.2/3600
	Starting system		Recoil / Electric	
	Combustion system		Direct injection	
	Governor system		All speed by centrifugal weight	
	Engine stop system		Fuel cut solenoid	
	Charging system	V-A	Flywheel dynamo 12-15	
	Battery	V-Ah	12V-21Ah	12V-28Ah
	Fuel oil	lit.	Diesel fuel oil	
	Fuel tank capacity	lit.	13	
	Lube oil capacity		1.1	1.65
	Operation capacity (One tankful)* approx.	Hr.	8	6
Unit	Noise level at 7m (approx.)	dBA	82	85
	Dimensions L X W X H, Recoil	mm	680 X 480 X605	720 X 480 X633
	Dimensions L X W X H, Electric	mm	680 X 480 X605	720 X 480 X633
	Dry weight(kg)	(Recoil)		
		(Electric)	85	113

STANDARD ACCESSORIES

Model		YDG3700W-6EI	YDG5500W-6EI
AC dual voltage		●	●
AC breaker		●	●
12V DC output		●	●
DC breaker		●	●
Voltage meter	Single	-	-
	Dual	●	●
Pilot lamp		-	-
Oil alert		●	●
Fuel gauge		●	●
Recoil start		●	●
Electric start		●	●
Tool set		●	●
Spark		●	●

YDG 3700

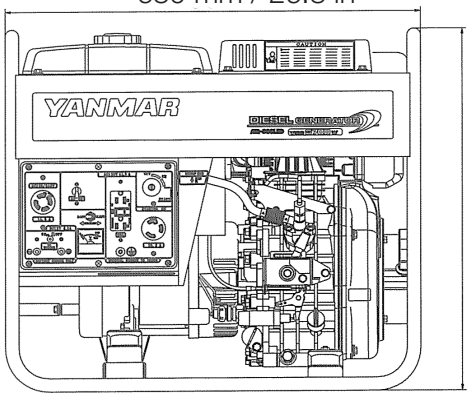

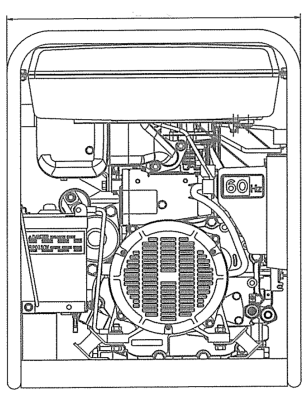
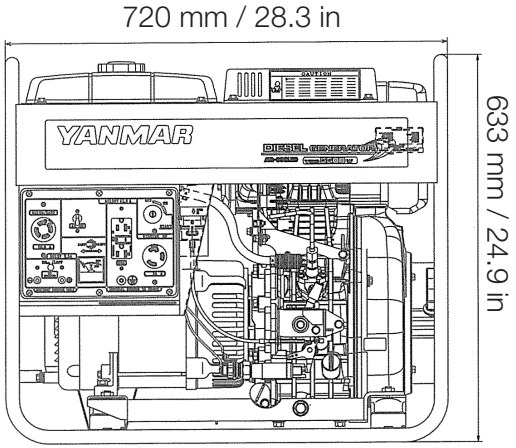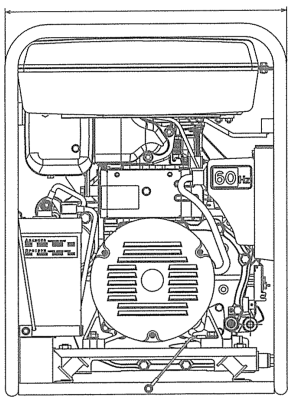
YDG 5500